




Electronic Fluorescent Ballast

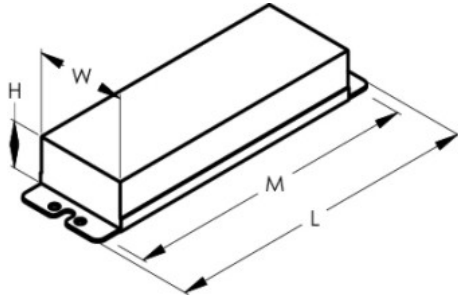

PE2/20RS120ES-TP

Ballast Type:	Electronic
Starting Method:	Rapid Start
Lamp Connection:	Parallel
Input Voltage:	120Vac \pm 10%
Input Frequency:	50/60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficiency Factor	Max. THD %
F20T8	2	34	0.50	0.57	1.52	0.88	2.59	130
F20T12	2	34	0.50	0.57	1.52	0.88	2.59	130
F18T8	2	34	0.49	0.57	1.54	0.94	2.76	130
F17T8	2	36	0.52	0.58	1.52	1.00	2.78	130
F15T8	2	31	0.46	0.56	1.57	1.00	3.23	130
F15T12	2	31	0.46	0.56	1.57	1.00	3.23	130
F14T8	2	27	0.41	0.54	1.60	0.88	3.26	130
F14T12	2	27	0.41	0.54	1.60	0.88	3.26	130

PERFORMANCE

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18 °C
- Maximum Case Temperature: 167 °F, 75 °C
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- Meets FCC Part 18 (Class B) Consumer Limits
- 3-Year Warranty


PHYSICAL DIMENSIONS

Length (L):	6.46"	Lead Length:	
Width (W):	1.37"	White:	12" x 12"
Height (H):	1.00"	Black:	12" x 12"
Mounting (M):	6.00"	Blue:	18"
		Red:	18"

APPROVALS:



Wiring Diagram:

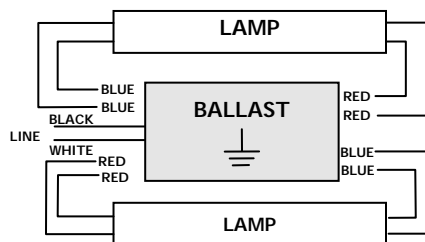

Hot Spot Location:

