




## ELECTRONIC FLUORESCENT BALLAST

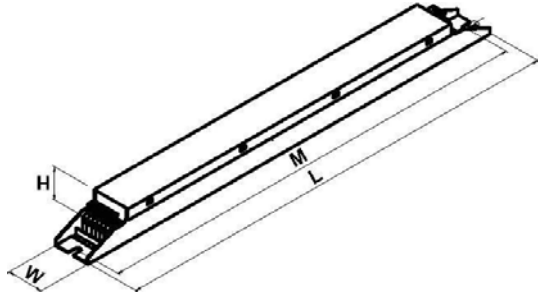


### PE2/24T5HOMV-TP-PS

Ballast Type:	Electronic
Starting Method:	Programmed Start
Lamp Connection:	Series
Input Voltage:	120-277Vac ± 10%
Input Frequency:	50/60Hz

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Max. Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F24T5/HO	2	120	52	0.44	0.98	1.7	1.00	1.92	10
		277	52	0.19	0.98	1.7	1.00	1.92	10
	1	120	27	0.23	0.98	1.7	1.02	3.78	10
		277	27	0.10	0.98	1.7	1.02	3.78	10
FT24W/2G11	2	120	52	0.44	0.98	1.7	1.00	1.92	10
		277	52	0.19	0.98	1.7	1.00	1.92	10
	1	120	27	0.23	0.98	1.7	1.02	3.78	10
		277	27	0.10	0.98	1.7	1.02	3.78	10
FC9T5 22W	2	120	52	0.44	0.98	1.7	1.00	1.92	10
		277	52	0.19	0.98	1.7	1.00	1.92	10
	1	120	27	0.23	0.98	1.7	1.02	3.78	10
		277	27	0.10	0.98	1.7	1.02	3.78	10
FC12T5 40W	1	120	40	0.34	0.98	1.7	0.84	2.10	10
		277	40	0.15	0.98	1.7	0.84	2.10	10
FT40W/2G11	1	120	47	0.40	0.98	1.7	1.00	2.13	10
		277	47	0.17	0.98	1.7	1.00	2.13	10
FT36W/2G11	1	120	34	0.29	0.98	1.7	0.90	2.65	10
		277	34	0.13	0.98	1.7	0.90	2.65	10

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:
<ul style="list-style-type: none"> <li>Sound Rated: A</li> <li>Minimum Starting Temperature: 0°, -18°</li> <li>Maximum Case Temperature: 194°, 90°</li> <li>Meets FCC Part 18 (Class A) Consumer Limits</li> <li>5-Year Warranty</li> </ul>	Length (L): 16.7" Width (W): 1.18" Height (H): 1.00" Mounting (M): 16.4"	<ul style="list-style-type: none"> <li>UL, cUL 935 Listed</li> <li>Transient Protection meets ANSI/IEEE C62.41 Cat. A</li> <li>Lamp end-of-life protected</li> </ul>

#### WIRING DIAGRAM:

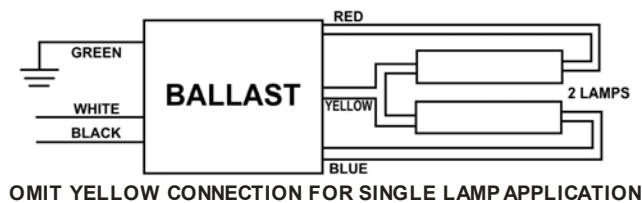

#### HOT SPOT LOCATION:

