





ELECTRONIC FLUORESCENT BALLAST

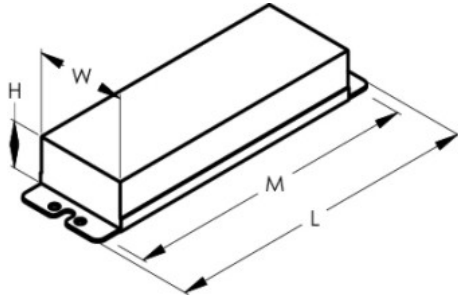


PE1/40RS120ES-TP

Ballast Type:	Electronic
Starting Method:	Rapid Start
Lamp Connection:	—
Input Voltage:	120Vac ± 10%
Input Frequency:	50/60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficiency Factor	Max. THD %
F40T12 (40W)	1	36	0.53	0.567	1.58	0.88	2.44	150
F34T12 (34W)	1	30	0.45	0.550	1.50	0.88	2.93	150
F40T12 (25W)	1	36	0.53	0.566	1.54	1.33	3.69	150
F30T12 (30W)	1	28	0.41	0.580	1.51	0.93	3.32	150

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:										
<ul style="list-style-type: none"> Sound Rated: A Minimum Starting Temperature: 0°F, -18 °C Maximum Case Temperature: 167 °F, 75 °C Transient Protection meets ANSI/IEEE C62.41 Cat. A Lamp end-of-life protected Meets FCC Part 18 (Class B) Consumer Limits 3-Year Warranty 	<table style="width: 100%; border: none;"> <tr> <td style="border: none;">Length (L): 6.46"</td> <td style="border: none;">Lead Length:</td> </tr> <tr> <td style="border: none;">Width (W): 1.37"</td> <td style="border: none;">White: 15"</td> </tr> <tr> <td style="border: none;">Height (H): 1.00"</td> <td style="border: none;">Black: 15"</td> </tr> <tr> <td style="border: none;">Mounting (M): 6.00"</td> <td style="border: none;">Blue: 25"</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;">Red: 25"</td> </tr> </table>	Length (L): 6.46"	Lead Length:	Width (W): 1.37"	White: 15"	Height (H): 1.00"	Black: 15"	Mounting (M): 6.00"	Blue: 25"		Red: 25"	 UL, cUL 935 listed
Length (L): 6.46"	Lead Length:											
Width (W): 1.37"	White: 15"											
Height (H): 1.00"	Black: 15"											
Mounting (M): 6.00"	Blue: 25"											
	Red: 25"											

Wiring Diagram:

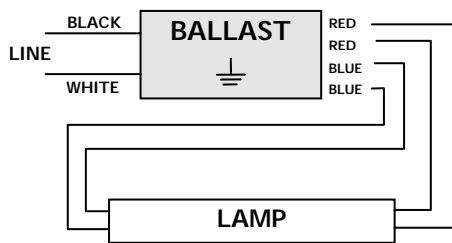

Hot Spot Location:

