




ELECTRONIC FLUORESCENT BALLAST

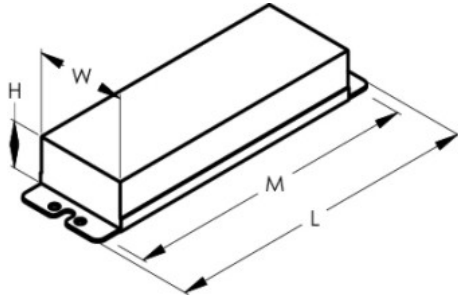

PE2/59ISMV-TP-PIC

Ballast Type:	Electronic
Starting Method:	Instant Start
Lamp Connection:	Parallel
Input Voltage:	120~277Vac \pm 10%
Input Frequency:	50Hz / 60Hz

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F96T8 59W	2	120	112	0.94	0.99	1.56	0.88	0.79	10
		277	112	0.41	0.99	1.55	0.88	0.79	10
F96T8 59W	1	120	70	0.58	0.99	1.44	0.88	1.26	10
		277	70	0.26	0.99	1.45	0.88	1.26	10

PERFORMANCE

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18 °C
- Maximum Case Temperature: 167 °F, 75 °C
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- 5-Year Warranty

PHYSICAL DIMENSIONS


Length (L): 9.45"
 Width (W): 1.80"
 Height (H): 1.37"
 Mounting (M): 8.90"

Lead Length:
 White: 22"
 Black: 22"
 Blue: 46"
 Red: 70"

APPROVALS:



Wiring Diagram:

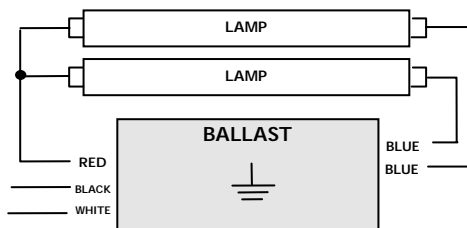

FOR ONE LAMP APPLICATION, CAP OFF ONE BLUE WIRE BALLAST MUST BE GROUNDED

Hot Spot Location:

