





## ELECTRONIC FLUORESCENT BALLAST

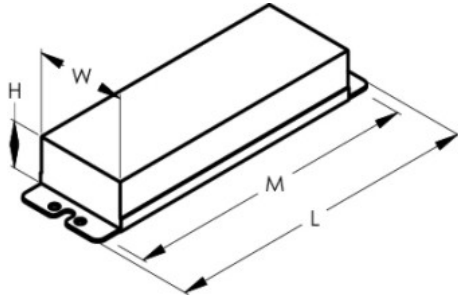

### PE2/96IS120ES-TP-PIC

Ballast Type:	Electronic
Starting Method:	Instant Start
Lamp Connection:	Parallel
Input Voltage:	120Vac $\pm$ 10%
Input Frequency:	50/60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F96T12 ES	2	108	0.91	>0.95	<1.7	0.88	0.81	10
F72T12	2	105	0.90	>0.95	<1.7	0.90	0.86	30

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:
<ul style="list-style-type: none"> <li>Sound Rated: A</li> <li>Minimum Starting Temperature: 0°F, -18 °C</li> <li>Maximum Case Temperature: 167 °F, 75 °C</li> <li>Meets FCC Part 18 (Class B) Consumer Limits</li> <li>Transient Protection meets ANSI/IEEE C62.41 Cat. A</li> <li>Ballast Frequency for all listed lamps: 50KHz-33KHz</li> <li>5-Year Warranty</li> </ul>	<p>Length (L): 9.50"</p> <p>Width (W): 1.38"</p> <p>Height (H): 1.18"</p> <p>Mounting (M): 8.90"</p> <p>Lead Length:</p> <p>White: 25"</p> <p>Black: 25"</p> <p>Blue: 60"</p> <p>Red: 60"</p>	 UL, cUL 935 Listed

