



ELECTRONIC FLUORESCENT BALLAST



PE2/28T5HEMV-TP-PS

Ballast Type:	Electronic
Starting Method:	High Efficiency
Lamp Connection:	Series
Input Voltage:	120-277Vac ± 10%
Input Frequency:	50/60Hz

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Max. Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F28T5/HE	2	120	67	0.56	0.99	1.7	1.05	1.57	10
		277	67	0.24	0.98	1.7	1.05	1.57	10
	1	120	33	0.28	0.95	1.7	1.04	3.15	12
		277	33	0.13	0.95	1.7	1.04	3.15	12
F21T5/HE	2	120	51	0.42	0.99	1.7	1.04	2.04	10
		277	51	0.19	0.98	1.7	1.04	2.04	10
	1	120	26	0.22	0.99	1.7	1.06	4.08	12
		277	26	0.10	0.95	1.7	1.06	4.08	12
F14T5/HE	2	120	34	0.28	0.99	1.7	1.04	3.06	12
		277	34	0.13	0.96	1.7	1.04	3.06	12
	1	120	19	0.16	0.98	1.7	1.12	5.89	15
		277	19	0.08	0.92	1.7	1.12	5.89	15

Performance

Physical Dimensions

Approvals


- Sound Rated: A
- Minimum Starting Temperature: 0°, -18°
- Maximum Case Temperature: 194°, 90°
- Meets FCC Part 18 (Class A) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- 3-Year Warranty

Length (L): 16.7"
 Width (W): 1.18"
 Height (H): 1.00"
 Mounting (M): 16.4"



UL, cUL 935 Listed

WIRING DIAGRAM

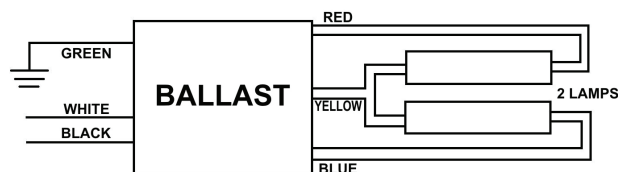

OMIT YELLOW CONNECTION FOR SINGLE LAMP APPLICATION

HOT SPOT LOCATION

