





ELECTRONIC CIRCLINE FLUORESCENT BALLAST

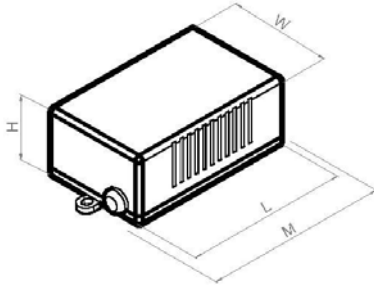

PEC1/22RS120ES-TP-WS

Ballast Type:	Electronic
Starting Method:	Rapid Start
Lamp Connection:	---
Input Voltage:	120Vac ± 10%
Input Frequency:	50Hz / 60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC8T9 (22W)	1	17	0.28	0.52	1.65	0.90	5.29	150

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:
<ul style="list-style-type: none"> Sound Rated: A Minimum Starting Temperature: 0°F, -18°C Maximum Case Temperature: 167°F, 75°C Meets FCC Part 18 (Class B) Consumer Limits Transient Protection meets ANSI/IEEE C62.41 Cat. A Ballast Frequency for all listed lamps: 20KHz-33KHz, 40KHz-50KHz Lamp end-of-life protected 3-Year Warranty 	<p>Length (L): 3.45" Width (W): 1.81" Height (H): 1.21" Mounting (M): 3.12"</p> <p>Lead Length: White, Black: 12" Blue: 9" Red: 9"</p> <p>With Circline Socket.</p>	 UL, cUL 935 Listed

WIRING DIAGRAM:

