





ELECTRONIC CIRCLINE FLUORESCENT BALLAST

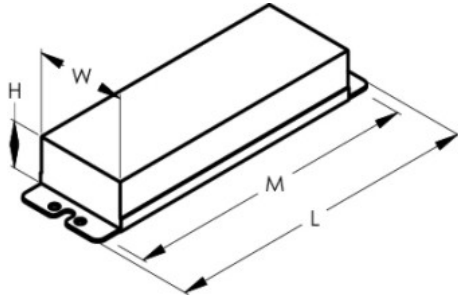

PEC2/22-32RS120ES-TP-WS

Ballast Type:	Electronic
Starting Method:	Programmed Preheat Start
Lamp Connection:	Parallel
Input Voltage:	120Vac \pm 10%
Input Frequency:	50Hz / 60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC8T9 FC12T9	2	48	0.68	0.58	1.58	0.85	1.77	130

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:
<ul style="list-style-type: none"> • Sound Rated: A • Minimum Starting Temperature: 0°F, -18°C • Maximum Case Temperature: 167°F, 75°C • Meets FCC Part 18 (Class B) Consumer Limits • Transient Protection meets ANSI/IEEE C62.41 Cat. A • Ballast Frequency for all Listed Lamps: 43KHz • Lamp end-of-life protected • On/Off Cycles (15 sec on 45 sec off): 25000 starts • 3-Year Warranty 	<p>Length (L): 6.46" Width (W): 1.89" Height (H): 1.00" Mounting (M): 6.00"</p> <p>Lead Length: White: 12" Black: 12" Blue: 9" Red: 9"</p>	 UL, cUL 935 Listed

WIRING DIAGRAM:

