



FLUORESCENT BALLAST

J1/40RS120LPF-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
1	F40T12 F30T12	25W 34W 40W 30W	120V	60Hz	0.65A	LPF RS	Other 50°F 34W 60°F	A

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions		Lead Lengths			
Length	Width	Height	Length	Width	Black	White	Blue	Red
6 1/2"	1 7/8"	1 2/5"	6 1/6"	1 7/8"	14"	30"	19"	32" x 32"

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
30 pcs.	61.75 lbs.	0.40 ft.	780 pcs.	1,649 lbs.	20.2 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

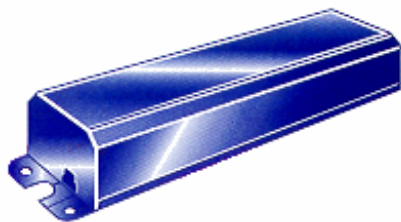

Certifications:
UL File No. E172098

ORDERING INFORMATION

J ▶	Jadco Fluorescent Ballast
1 ▶	Primary Lamp Count Design
40 ▶	Primary Lamp Type
RS ▶	Ballast Type - Rapid Start
120 ▶	Input Line Voltage
LPF ▶	Low Power Factor
TP ▶	Thermally Protected