



FLUORESCENT BALLAST

J2/20TS120-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
2	F15T8 F15T12 F20T12	15W or 20W	120V	60Hz	0.75A	LPF TS	50°F	A

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions				Lead Lengths		
Length	Width	Height	Length	Width	Black	White	Blue	Red	Yellow
6 5/8"	2 1/3"	1 7/12"	6 1/6"	2 1/3"	12"	12"	15" x 15"	15" x 15"	23" x 23"

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
20 pcs.	49 lbs.	0.40 ft.	780 pcs.	2,002 lbs.	25.4 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

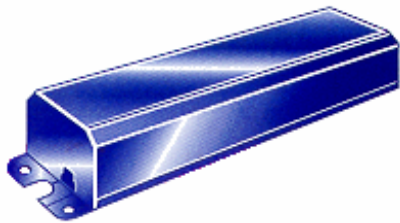



Certifications:
 UL File No. E172098

ORDERING INFORMATION

J ▶	JADCO Compact Fluorescent Ballast
2 ▶	Primary Lamp Count Design
20 ▶	Primary Lamp Type
TS ▶	Ballast Type - Trigger Start
120 ▶	Input Line Voltage
TP ▶	Thermally Protected