



FLUORESCENT BALLAST

J2/40RS120E-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
2	F40T12	34W or 40W	120V	60Hz	0.65A	HPF RS	60°F (34W) 50°F (40W)	A

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions		Lead Lengths				
Length	Width	Height	Length	Width	Black	White	Blue	Red	Yellow
9 ½"	2 2/5"	1 5/8"	8 7/8"	2 2/5"	22"	22"	26" x 26"	26" x 26"	37" X 37"

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
10 pcs.	33.1 lbs.	0.39 ft.	540 pcs.	1,922 lbs.	27.3 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

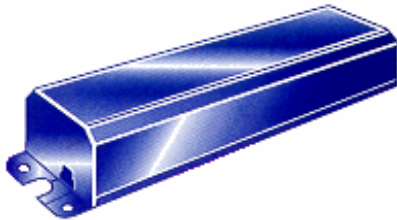

Certifications:
UL File No. E172098

Ordering Information

J ▶	Jadco Fluorescent Ballast
2 ▶	Primary Lamp Count Design
40 ▶	Primary Lamp Type
RS ▶	Ballast Type - Rapid Start
120 ▶	Input Line Voltage
E ▶	Economy
TP ▶	Thermally Protected