



## FLUORESCENT BALLAST

### J2/40RS277ES-TP

#### ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
2	F40T12	34W or 40W	277V	60Hz	0.32A	HPF RS	60°F (34W) 50°F (40W)	A

#### PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions			Lead Lengths			
Length	Width	Height	Length	Width	Black	White	Blue	Red	Yellow
9 1/2"	2 2/5"	1 5/8"	8 7/8"	2 2/5"	22"	22"	26" x 26"	26" x 26"	37" x 37"

#### PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
10 pcs.	33.1 lbs.	0.39 ft.	540 pcs.	1,982 lbs.	23.8 ft.

#### CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓	✓			✓

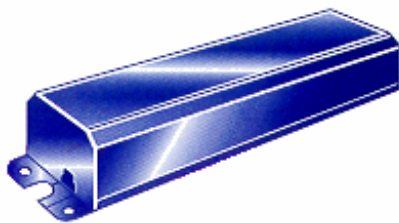

**Certifications:**  
UL File No. E172098



#### Ordering Information

<b>J</b>	▶ JADCO Fluorescent Ballast
<b>2</b>	▶ Primary Lamp Count Design
<b>40</b>	▶ Primary Lamp Type
<b>RS</b>	▶ Ballast Type - Rapid Start
<b>277</b>	▶ Input Line Voltage
<b>ES</b>	▶ Energy Saving
<b>TP</b>	▶ Thermally Protected