



FLUORESCENT BALLAST

J2/96SL120

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
2	F72T12 F96T12	50W 60W or 75W	120V	60Hz	1.0A	HPF SL	60°F (60W) 50°F (75W)	C

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions		Lead Lengths			
Length	Width	Height	Length	Width	Black	White	Blue	Red
9 7/16"	3 5/32"	1 7/8"	8 2/3"	3 5/32"	72"	72"	48"	48"

PACKAGING INFORMATION

Units/ Carton	Weight/ Carton	Cube/ Carton	Quantity/ Pallet	Weight/ Pallet	Cube/ Pallet
6 pcs.	36 lbs.	0.33 ft.	360 pcs.	2,480 lbs.	20 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

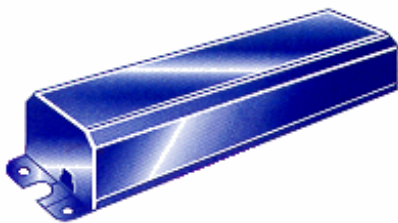

Certifications:
UL File No. E172098

ORDERING INFORMATION:

J ▶ JADCO Fluorescent Ballast
2 ▶ Primary Lamp Count Design
96 ▶ Primary Lamp Type
SL ▶ Ballast Type - Slimline
120 ▶ Input Line Voltage