



FLUORESCENT BALLAST

J2/96SL120ES-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
2	F72T12 F96T12	50W 60W or 75W	120V	60Hz	1.4A	HPF SL	60°F (60W) 50°F (75W)	C

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions		Lead Lengths			
Length	Width	Height	Length	Width	Black	White	Blue	Red
11 2/3"	3 5/32"	1 7/8"	11 1/16"	3 5/32"	72"	72"	48"	48"

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
6 pcs.	49 lbs.	0.40 ft.	234 pcs.	1,907 lbs.	24.5 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓	✓	✓		✓

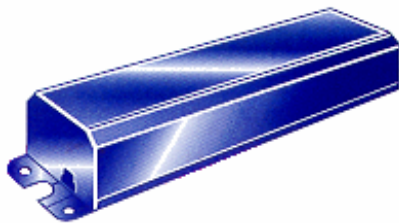

Certifications:
UL File No. E172098



ORDERING INFORMATION:

J	▶ JADCO Fluorescent Ballast
2	▶ Primary Lamp Count Design
96	▶ Primary Lamp Type
SL	▶ Ballast Type - Slimline
120	▶ Input Line Voltage
ES	▶ Energy Saving
TP	▶ Thermally Protected