



FLUORESCENT BALLAST

J2/96SL277ES-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
2	F72T12 F96T12	50W 60W or 75W	277V	60Hz	0.60A	HPF SL	60°F (60W) 50°F (75W)	C

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions		Lead Lengths				
Length	Width	Height	Length	Width	Black	White	Blue	Red	Yellow
11 2/3"	3 5/32"	1 7/8"	11 1/6"	3 5/32"	72"	72"	48"	48"	72" x 72"

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
6 pcs.	49 lbs.	0.40 ft.	234 pcs.	1,960 lbs.	20 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓	✓			✓

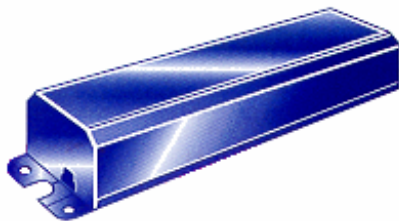

Certifications:
UL File No. E172098



ORDERING INFORMATION

J ▶	Jadco Fluorescent Ballast
2 ▶	Primary Lamp Count Design
96 ▶	Primary Lamp Type
SL ▶	Ballast Type - Slimline
277 ▶	Input Line Voltage
ES ▶	Energy Saving
TP ▶	Thermally Protected