



FLUORESCENT BALLAST

JC2/22-32RS120-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
1	FC8T9 FC12T9	22W and 32W	120V	60Hz	0.72A	LPF RS	50°F	A

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions			Lead Lengths			
Length	Width	Height	Length	Width	Black	White	Blue	Red	Yellow
6 5/8"	2 3/8"	1 7/12"	6 1/16"	2 3/8"	12"	12"	9" x 9"	9" x 9"	9" x 9" 9" x 9"

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
20 pcs.	27 lbs.	0.40 ft.	780 pcs.	2,002 lbs.	17.4 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

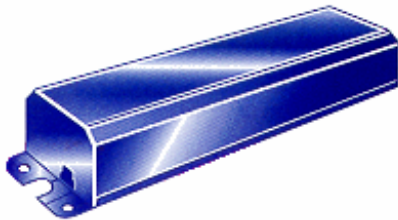

Certifications:
UL File No. E172098

ORDERING INFORMATION

JC	JADCO Circline Fluorescent Ballast
2	Primary Lamp Count Design
22-32	Primary Lamp Type
RS	Ballast Type - Rapid Start
120	Input Line Voltage
TP	Thermally Protected