




THREADED CONDUIT BODIES—LR TYPE

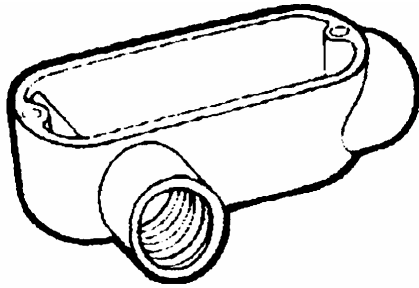

SPECIFICATIONS

- Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.
- Flat back design for easy mounting close to walls.
- Can be assembled with fiber gasket or neoprene gasket, and stamped cover or die cast cover.
- Die cast from high strength, corrosion, and weather resistant, copper free aluminum alloy. *

* Applies only to ½" - 2"

PACKING INFORMATION

Model Number	Trade Size	Inner Ctn. Packing	Inner Ctn. Weight	Outer Ctn. Packing	Outer Ctn. Weight
JLR-1	½"	10	2.55	100	25.50
JLR-2	¾"	10	2.05	50	10.25
JLR-3	1"	5	3.00	25	15.00
JLR-4	1¼"	2	2.56	10	12.81
JLR-5	1½"	---	---	10	11.56
JLR-6	2"	1	2.31	5	11.56
JLR-7	2½"	---	---	1	5.00
JLR-8	3"	---	---	1	5.67
JLR-9	3½"	---	---	1	10.17
JLR-10	4"	---	---	1	9.17



Certifications:
UL File No. E121488
CSA File No. LR57925

