




## THREADED CONDUIT BODIES—LL TYPE

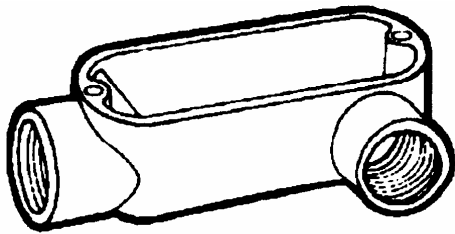

### SPECIFICATIONS

- Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.
- Flat back design for easy mounting close to walls.
- Can be assembled with fiber gasket or neoprene gasket, and stamped cover or die cast cover.
- Die cast from high strength, corrosion, and weather resistant, copper free aluminum alloy. \*

\* Applies only to ½" - 2"

### PACKING INFORMATION

Model Number	Trade Size	Inner Ctn. Packing	Inner Ctn. Weight	Outer Ctn. Packing	Outer Ctn. Weight
JLL-1	½"	10	2.45	100	24.50
JLL-2	¾"	10	3.41	50	17.05
JLL-3	1"	5	2.88	25	14.38
JLL-4	1 ¼"	2	2.25	10	11.25
JLL-5	1 ½"	---	---	10	12.81
JLL-6	2"	1	2.13	5	10.63
JLL-7	2 ½"	---	---	1	5.00
JLL-8	3"	---	---	1	5.67
JLL-9	3 ½"	---	---	1	9.00
JLL-10	4"	---	---	1	10.00



**Certifications:**  
UL File No. E121488  
CSA File No. LR57925

