




THREADED CONDUIT BODIES—C TYPE

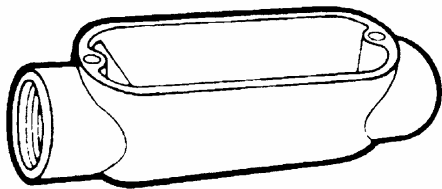

SPECIFICATIONS

- Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.
- Flat back design for easy mounting close to walls.
- Can be assembled with fiber gasket or neoprene gasket, and stamped cover or die cast cover.
- Die cast from high strength, corrosion, and weather resistant, copper free aluminum alloy. *

* Applies only to ½" - 2"

PACKING INFORMATION

Model Number	Trade Size	Inner Ctn. Packing	Inner Ctn. Weight	Outer Ctn. Packing	Outer Ctn. Weight
JLC-1	½"	10	2.45	80	24.50
JLC-2	¾"	10	3.58	50	17.85
JLC-3	1"	5	2.70	25	13.53
JLC-4	1¼"	2	2.56	10	12.81
JLC-5	1½"	2	2.31	10	11.56
JLC-6	2"	1	2.19	5	10.94
JLC-7	2½"	--	--	1	5.00
JLC-8	3"	--	--	1	5.67
JLC-9	3½"	--	--	1	8.67
JLC-10	4"	--	--	1	9.67



Certifications:
UL File No. E121488
CSA File No. LR57925

