




## ALUMINUM STAMPED COVERS

### SPECIFICATIONS

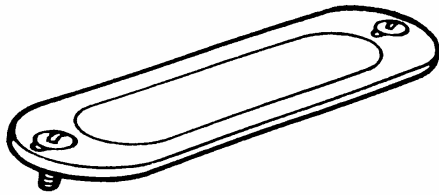

- Used with aluminum conduit bodies.
- Assembled with captive zinc plated steel screws.
- Stamped from high strength aluminum, or die cast from high strength, corrosion, and weather resistant, copper free aluminum alloy.

### PACKING INFORMATION

Model Number	Trade Size	Outer Ctn. Packing	Outer Ctn. Weight	Screw Size (UNC-2A)
<b>JASC-1</b>	½"	50	2.10	No. 8-32 x 3/8"
<b>JASC-2</b>	¾"	50	2.91	No. 8-32 x 3/8"
<b>JASC-3</b>	1"	50	3.75	No. 8-32 x 3/8"
<b>JASC-4/5</b>	1 ¼" - 1 ½"	50	7.17	No. 12-24 x ½"
<b>JASC-6</b>	2"	25	5.79	No. 12-24 x ½"
<b>JASC-7/8</b>	2 ½" - 3"	10	6.92	5/16-18 x ½"
<b>JASC-9/10</b>	3 ½" - 4"	5	2.97	5/16-18 x ½"



**Certifications:**  
 UL File No. E121488  
 CSA File No. LR57925

