




## PULL ELBOWS: RIGID-TO-RIGID

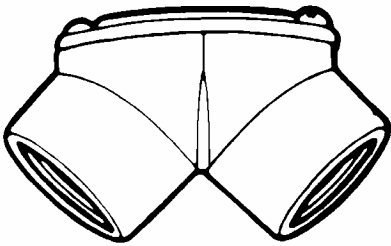

### SPECIFICATIONS

- Used to connect two lengths of threaded rigid conduit or IMC to form a 90° bend.
- Removable aluminum cover and neoprene gasket facilitate wire pulling.
- Die cast from high strength zinc alloy.

### PACKING INFORMATION - without Gasket

Model Number	Trade Size	Inner Ctn. Packing	Inner Ctn. Weight	Outer Ctn. Packing	Outer Ctn. Weight
JPR-1	½"	10	1.87	100	18.70
JPR-2	¾"	5	1.33	50	13.30
JPR-3	1"	--	--	25	15.30
JPR-4	1 ¼"	--	--	20	18.32

### PACKING INFORMATION - with Gasket

Model Number	Trade Size	Inner Ctn. Packing	Inner Ctn. Weight	Outer Ctn. Packing	Outer Ctn. Weight
JPRG-1	½"	10	1.79	100	17.86
JPRG-2	¾"	5	1.28	50	12.79
JPRG-3	1"	--	--	25	12.63
JPRG-4	1 ¼"	--	--	20	14.35



**Certifications:**  
 UL File No. E121488  
 CSA File No. LR57925

