




## MALLEABLE IRON THREE-PIECE COUPLING

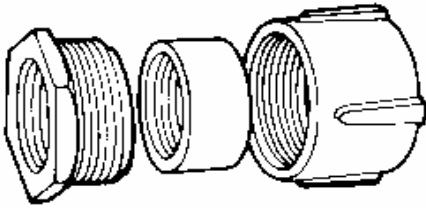

### SPECIFICATIONS

- Used to connect two lengths of threaded rigid conduit or IMC, when neither conduit can be turned.
- Cast of high strength malleable iron and zinc plated.

### PACKING INFORMATION

Model Number	Trade Size	Inner Ctn. Packing	Inner Ctn. Weight	Outer Ctn. Packing	Outer Ctn. Weight
<b>JTPC-1</b>	½"	10	2.42	100	24.20
<b>JTPC-2</b>	¾"	5	1.58	50	15.75
<b>JTPC-3</b>	1"	5	2.76	50	27.55
<b>JTPC-4</b>	1¼"	5	5.96	25	29.80
<b>JTPC-5</b>	1½"	5	7.00	25	35.00
<b>JTPC-6</b>	2"	--	--	20	39.80
<b>JTPC-7</b>	2½"	--	--	10	36.12
<b>JTPC-8</b>	3"	--	--	5	22.70
<b>JTPC-9</b>	3½"	--	--	5	31.86
<b>JTPC-10</b>	4"	--	--	2	16.22



Certifications:  
UL File No. E121488  
CSA File No. LR57925

