




EXIT SIGN EMERGENCY LIGHT

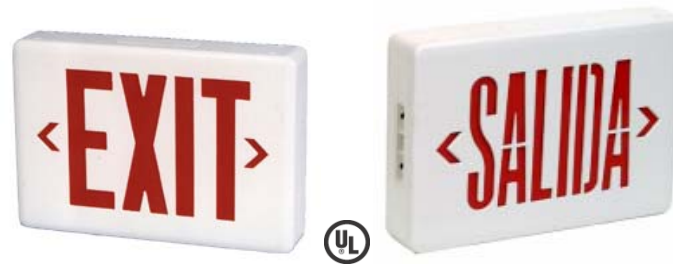

ELECTRICAL CHARACTERISTICS

Model #	Housing	Emergency	Lamp Type	Input Power 120V	Input Power 277V
JSE-100R	Thermoplastic	Self Powered	LED - Red (EXIT)	3.6W	3.6W
JSE-100R-SAL	Thermoplastic	Self Powered	LED - Red (SALIDA)	3.6W	3.6W

PACKING INFORMATION

Units Per Carton	Weight Per Unit	Cube Unit
1 pc.	3.3 lbs.	0.23 cu.

Construction & Application

- **Description:** The JSE-100R is an economical and energy saving Exit sign. The injection molded plastic housing has soft rounded corners for aesthetic appeal. The LED lamps provide a maximum of energy savings potential and the battery pack allows the unit to be Self Powered during power outages.
- **Application:** Suitable for use in almost any commercial or light industrial application.
- **Approvals:** UL924. ETL listed. Life Safety NFPA 101.
- **Housing:** The housing is made of injection molded thermoplastic making it impact resistant and corrosion proof. UL94-5V rated.
- **Mounting:** Easy snap fit canopy can be used for top or end mounting or knockouts can be used for surface mounting. Included second face allows the unit to be used as a single or double face exit sign. Snap fitting, replaceable chevrons for direction indication.
- **Lamps:** Long life Light Emitting Diode (LED) lamps provide the maximum in energy savings.
- **Electrical / Battery:** Dual voltage input 120/277 VAC, 60 Hz.
 - Maintenance free, Sealed Nickel Cadmium battery provides a minimum 1 ½ hour emergency operation.
 - Low voltage disconnect of the battery prevents deep discharge and maintains good battery life.
 - Fully automatic, solid state charger.
 - Test switch with LED charge indicator/AC voltage indicator.
 - Line latching feature prevents the unit from turning on during installation to a non-energized AC circuit. Saves labor since the installer does not have to return to connect the battery terminals