




SMALL ENTRY LIGHT (WIRED) GLASS LENS

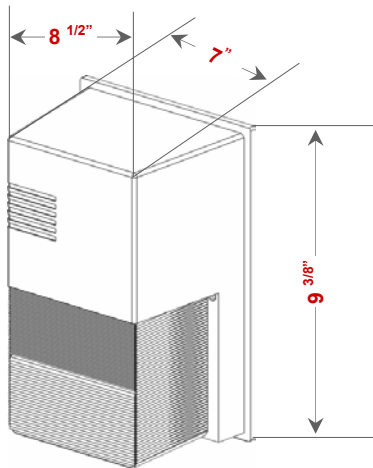

CONSTRUCTION

- Die Cast Bronze Housing
- Heat Resistant Borosilicate Glass Reflector
- Stainless Steel Screws and Silicone Gasketing
- Includes porcelain medium base socket
- Includes Lamp & Ballast as shown

APPLICATION

- Ideal for Security and Perimeter Lighting
- For Warehouse, Schools, and Loading Docks
- Commercial, Industrial, and Institutional Lighting

ELECTRICAL CHARACTERISTICS

Model #	Voltage	Wattage	Hertz	Lamp Type	Ballast
JWL35HPS120-PK	120V	35W	60Hz	HPS	REACTOR-NPF
JWL50HPS120-PK	120V	50W	60Hz	HPS	REACTOR-NPF
JWL70HPS120-PK	120V	70W	60Hz	HPS	REACTOR-NPF
JWL100HPS120-PK	120V	100W	60Hz	HPS	REACTOR-NPF
JWL150HPS120-PK	120V	150W	60Hz	HPS	REACTOR-NPF
JWL50MHQV-PK	Quad	50W	60Hz	MH	HX-HPF
JWL70MHQV-PK	Quad	70W	60Hz	MH	HX-HPF
JWL100MHQV-PK	Quad	100W	60Hz	MH	HX-HPF
JWL50HPS220/50-PK	220V/240V	50W	50Hz	HPS	REACTOR-NPF
JWL70HPS220/50-PK	220V/240V	70W	50Hz	HPS	REACTOR-NPF
JWL100HPS220/50-PK	220V/240V	100W	50Hz	HPS	REACTOR-NPF
JWL150HPS220/50-PK	220V/240V	150W	50Hz	HPS	REACTOR-NPF
JWP70MH220/50-PK	220V/240V	70W	50Hz	MH	HX-HPF
JWP100MH220/50-PK	220V/240V	100W	50Hz	MH	HX-HPF

PRODUCT DIMENSIONS

Width

8 1/2"

Height

9 3/8"

Depth

7"