



## COMPACT FLUORESCENT SECURITY LIGHT

Model #	Wattage	Voltage	Hertz	Ballast	Base	Lumens
<b>JSL65CFL120PC-PK/PCW</b>	1 x 65W Self Ballasted CFL Bulb	120V	50/60Hz	Electronic	E26	4300
<b>JSL65CFL240PC-PK/PCW</b>	1 x 65W Self Ballasted CFL Bulb	240V	50/60Hz	Electronic	E26	4300
<b>JSL105CFL120PC-PK/PCW</b>	1 x 105W Self Ballasted CFL Bulb	120V	50/60Hz	Electronic	E40	5000

### PRODUCT DIMENSIONS

	Width	Height	Depth
<b>JSL65CFL120PC-PK/PCW</b>	8-5/8"	10-5/8"	7-1/2"
<b>JSL65CFL240PC-PK/PCW</b>	8-5/8"	10-5/8"	7-1/2"
<b>JSL105CFL120PC-PK/PCW</b>	10-1/2"	14"	15"

### PACKING INFORMATION

	Pcs/Ctn	Weight/Ctn	Cube/Ctn
<b>JSL65CFL120PC-PK/PCW</b>	4 pcs.	13.17 lbs.	1.99
<b>JSL65CFL240PC-PK/PCW</b>	4 pcs.	13.17 lbs.	1.99
<b>JSL105CFL120PC-PK/PCW</b>	2 pcs.	11.02 lbs.	2.08

### APPLICATIONS & FEATURES


#### APPLICATIONS:

- Yards, Parking Lots, Service Roads, and Building Perimeters


#### FEATURES

- Suburban Style Fixture with a 65W or 105W Spiral Fluorescent Bulb
- 65W has Medium Base bulb and 105W has Mogul Base Bulb
- Low Maintenance
- New Designer Generation Compact Photocell Polycarbonate Parts Resistant to UV Rays and Impacts
- Self Extinguishable
- White Finish
- Self Ballasted 65W or 105W Spiral Fluorescent Bulb Included

#### LIGHTING COVERAGE

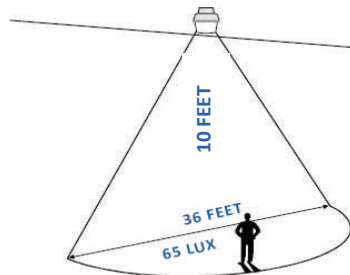

Maximum Recommended Separation Between Fixtures: 36 Feet



- Excellent for Exterior Installation
- Easy Wall Mount (1) or Post Mount (2)

