





## ELECTRONIC CIRCLINE FLUORESCENT BALLAST

### PEC1/40RS120ES-TP-WS

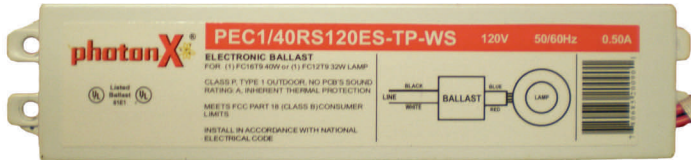

<b>Ballast Type:</b>	Electronic
<b>Starting Method:</b>	Rapid Start
<b>Lamp Connection:</b>	---
<b>Input Voltage:</b>	120Vac $\pm$ 10%
<b>Input Frequency:</b>	50Hz / 60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC16T9 (40W)	1	37.5	0.53	0.58	1.41	0.95	2.53	150
FC12T9 (32W)	1	29	0.42	0.57	1.40	0.92	3.17	150

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:
<ul style="list-style-type: none"> <li>• Sound Rated: A</li> <li>• Minimum Starting Temperature: 0°F, -18°C</li> <li>• Maximum Case Temperature: 167°F, 75°C</li> <li>• Meets FCC Part 18 (Class B) Consumer Limits</li> <li>• Transient Protection meets ANSI/IEEE C62.41 Cat. A</li> <li>• Lamp end-of-life protected</li> <li>• 3-Year Warranty</li> </ul>	<p>Length (L): 6.46"                      Width (W): 1.37"                      Height (H): 1.00"                      Mounting (M): 6.00"</p>	 UL, cUL 935 Listed

### WIRING DIAGRAM:

