




ELECTRONIC CIRCLINE FLUORESCENT BALLAST

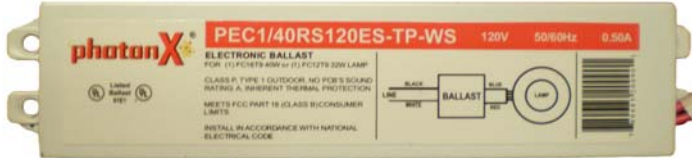

PEC1/40RS120ES-TP-WS

Ballast Type:	Electronic
Starting Method:	Rapid Start
Lamp Connection:	---
Input Voltage:	120Vac ± 10%
Input Frequency:	50Hz / 60Hz

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
FC16T9 (40W)	1	37.5	0.53	0.58	1.41	0.95	2.53	150
FC12T9 (32W)	1	29	0.42	0.57	1.40	0.92	3.17	150

Performance

Physical Dimensions

Lead Lengths

Approvals

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- 3-Year Warranty


Length (L): 6.46"
 Width (W): 1.37"
 Height (H): 1.00"
 Mounting (M): 6.00"

White: 12"
 Black: 12"
 Blue: 9"
 Red: 9"

With Circline Socket.



WIRING DIAGRAM

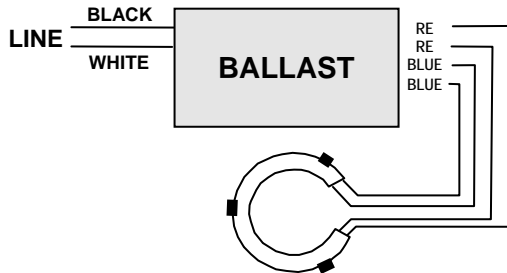

HOT SPOT LOCATION

