




ELECTRONIC COMPACT FLUORESCENT BALLAST

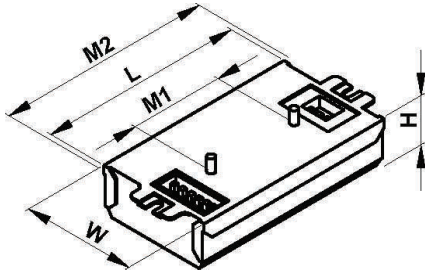


PECF2/13PSMV-TP-DW

Ballast Type:	Electronic
Starting Method:	Programmed Start
Lamp Connection:	Series
Input Voltage:	120-277Vac ± 10%
Input Frequency:	50Hz / 60Hz


Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
CFQ13W/G24q	2	120	29	0.25	0.99	1.5	1.00	3.45	10
		277	29	0.11	0.99	1.5	1.00	3.45	10
	1	120	16	0.16	0.96	1.5	1.00	6.25	10
		277	16	0.06	0.96	1.5	1.00	6.25	10
CFTR13W /GX24q	2	120	29	0.25	0.99	1.5	1.00	3.45	10
		277	29	0.11	0.99	1.5	1.00	3.45	10
	1	120	16	0.16	0.96	1.5	1.00	6.25	10
		277	16	0.06	0.96	1.5	1.00	6.25	10
CFQ18W/G24q	1	120	20	0.17	0.99	1.5	1.0	5.00	12
		277	20	0.07	0.97	1.5	1.0	5.00	12
CFTR18W/GX24q	1	120	20	0.17	0.99	1.5	1.0	5.00	12
		277	20	0.07	0.97	1.5	1.0	5.00	12
F14T5	2	120	31	0.26	0.99	1.5	1.0	3.22	10
		277	31	0.12	0.98	1.5	1.0	3.22	10
F13T5	2	120	30	0.25	0.99	1.5	1.0	3.33	10
		277	30	0.11	0.98	1.5	1.0	3.33	10
CFS10W /GR10q	2	120	23	0.19	0.97	1.5	0.95	4.13	11
		277	23	0.09	0.97	1.5	0.95	4.13	11
	1	120	13	0.11	0.96	1.5	1.05	8.08	14
		277	13	0.05	0.96	1.5	1.05	8.08	14
CFS16W /GR10q	1	120	17	0.14	0.96	1.5	1.00	5.88	12
		277	17	0.06	0.96	1.5	1.00	5.88	12

PERFORMANCE	PHYSICAL DIMENSIONS	APPROVALS:	OPTIONS:
<ul style="list-style-type: none"> • Sound Rated: A • Minimum Starting Temperature: 0°F, -18°C • Maximum Case Temperature: 194°F, 90°C • Meets FCC Part 18 (Class B) Consumer Limits • Transient Protection meets ANSI/IEEE C62.41 Cat. A • Lamp end-of-life protected • 3-Year Warranty 	Length: 5.00" Width: 2.40" Height: 1.00" Mounting: 4.63"	 UL, cUL	also available versions <ul style="list-style-type: none"> • without studs • with lead wires

WIRING DIAGRAM:

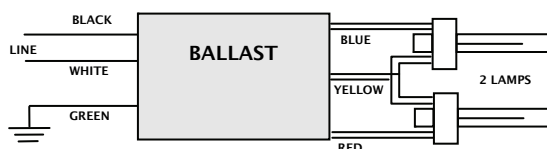

Two Lamp Applications

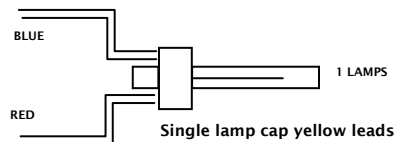

Single Lamp Application

