



## FLUORESCENT BALLAST

### JC1/22RS120-TP

#### ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
1	FC8T9	22W	120V	60Hz	0.625A	LPF RS	50°F	A

#### PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions		Lead Lengths			
Length	Width	Height	Length	Width	Black	White	Blue	Red
6 ½"	1 7/8"	1 5/12"	6 1/16"	1 7/8"	12"	12"	9"	9" x 9"

#### PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
30 pcs.	61 lbs.	0.40 ft.	780 pcs.	1,830 lbs.	17.5 ft.

#### CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

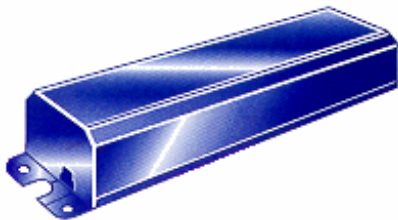

Certifications:  
UL File No. E172098

#### Ordering Information

<b>JC</b>	▶	Jadco Circline Fluorescent Ballast
<b>1</b>	▶	Primary Lamp Count Design
<b>22</b>	▶	Primary Lamp Type
<b>RS</b>	▶	Ballast Type - Trigger Start
<b>120</b>	▶	Input Line Voltage
<b>TP</b>	▶	Thermally Protected