



FLUORESCENT BALLAST

J1/96SL120ES-TP

ELECTRICAL CHARACTERISTICS

No. Lamps	Lamp Type	Nominal Lamp Watts	Line Voltage	Hertz	Line Current (Amps)	Ballast Type	Min. Start Temp.	Sound Rating
1	F72T12 F96T12 F96T12	55W 60W 75W	120V	60Hz	0.73A	IS	50°F (55W) 50°F (60W) 60°F (75W)	C

PHYSICAL CHARACTERISTICS


Overall Dimensions			Mounting Dimensions			Lead Lengths		
Length	Width	Height	Length	Width	Black	White	Blue	Red
9.65"	3.15"	1.85"	9.0"	----	72"	72"	48"	----

PACKAGING INFORMATION

Units/Carton	Weight/Carton	Cube/Carton	Quantity/Pallet	Weight/Pallet	Cube/Pallet
6 pcs.	48 lbs.	0.40 ft.	234 pcs.	1,867 lbs.	24.5 ft.

CERTIFICATIONS

UL	CSA	CBM	cUL	E
✓			✓	

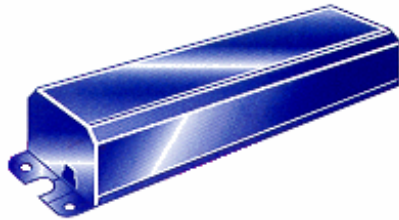

Certifications:
UL File No. E172098

ORDERING INFORMATION

J ▶	Jadco Fluorescent Ballast
1 ▶	Primary Lamp Count Design
96 ▶	Primary Lamp Type
SL ▶	Ballast Type - Slimline
120 ▶	Input Line Voltage
ES ▶	Energy Saving
TP ▶	Thermally Protected